



# **Parallel implementation of FETI-2LM for large problems with many RHS in CEM**

François-Xavier Roux  
Roberto Molina (LJLL, UPMC)




r e t u r n   o n   i n n o v a t i o n

# Summary

- Antenna array problem
- FETI-2LM
- FETI-2LM for Maxwell with Nédélec finite elements
- Acceleration of iterations via reuse of search directions
- Parallel local direct solver
- Block strategy
- Conclusion


# Antenna Arrays

Electric Field at  $z = 5\text{mm}$

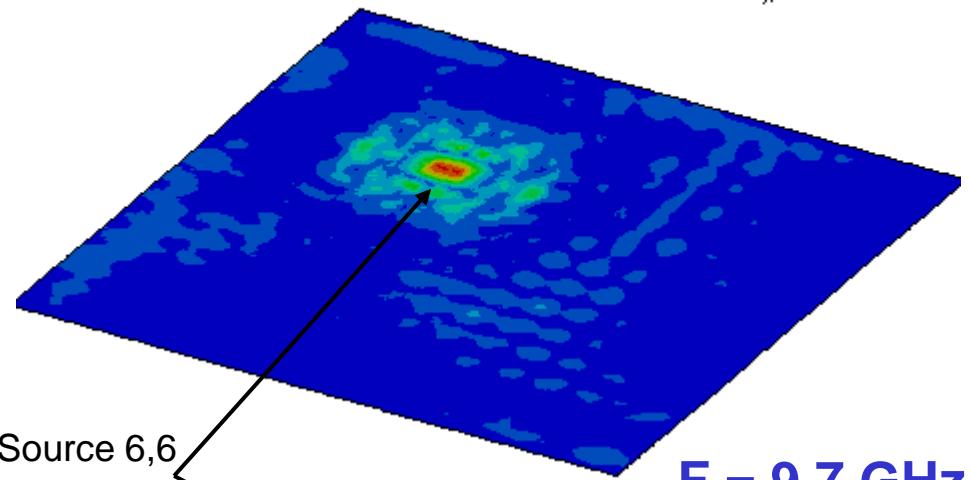


Source 6,6

**$F = 9.7 \text{ GHz}$**

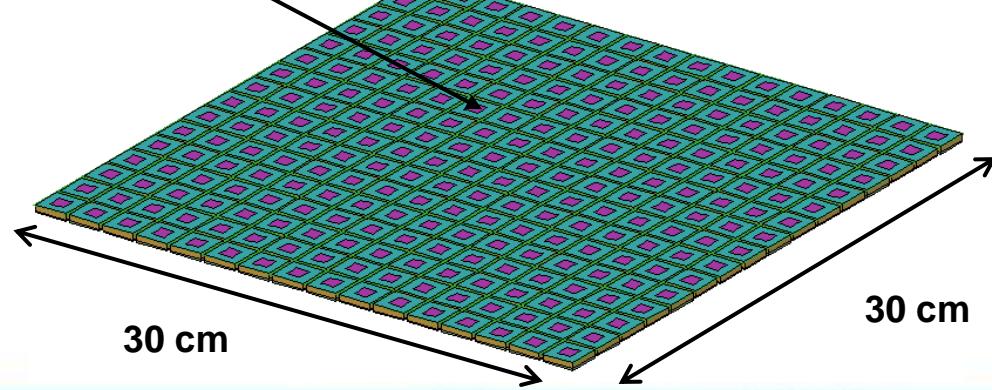


- 2D device, attached to the fuselage of the plane
  - Complex treatment to orient the radar beam
  - Larger arrays for higher intensity
- 
- Fine local mesh to take into account the complex structure of each element

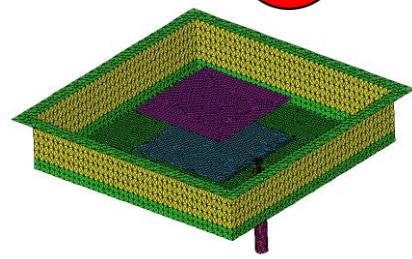

# Maxwell equations

Find the diffracted electric field  $\vec{E} \in H(\text{curl}; \Omega)$  such that

$$\left\{ \begin{array}{l} \nabla \times (\frac{1}{\vec{\mu}_r} \nabla \times \vec{E}) - k_0^2 \vec{\epsilon}_r \vec{E} = k_0^2 (\epsilon_{r,i} - \mu_{r,i}^{-1}) \vec{E}_{incident} \quad \text{in} \quad \Omega \subset R^3 \\ Z_0 R_e (\vec{n} \times \vec{H}) + \vec{n} \times (\vec{n} \times \vec{E}) = 0 \quad \text{on} \quad \Gamma_r \\ \vec{n} \times \vec{E} = -\vec{n} \times \vec{E}_{incident} \quad \text{on} \quad \Gamma_e (PEC) \\ \vec{n} \times (\nabla \times \vec{E}) + jk_0 \vec{n} \times (\vec{n} \times \vec{E}) = 0 \quad \text{on} \quad \Gamma_{ext} \end{array} \right.$$

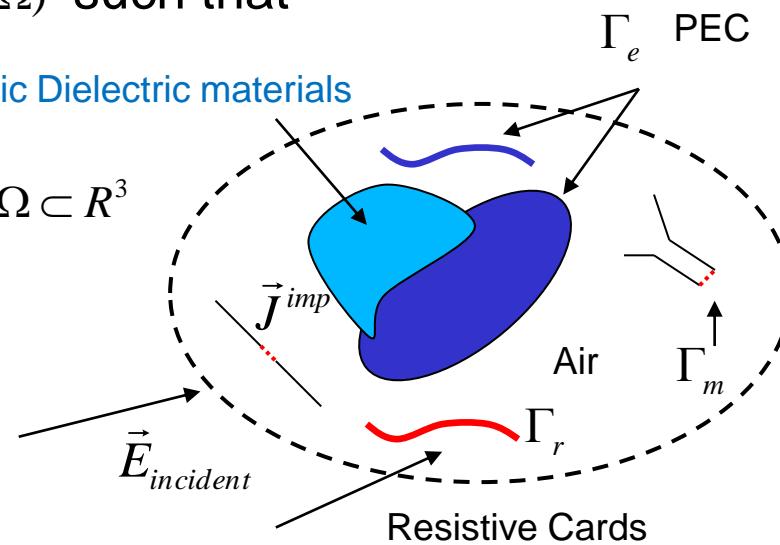

ABC



## Multiple sources:

- plane waves
  - modes


## FEM: Nédélec tetrahedral elements

- Degree 1 (6 dof)
  - Degree 2 (20 dof)

# Domain decomposition method with Robin interface conditions

- Local Problems with Robin boundary conditions

$$\begin{cases} -\Delta u_1 = f \text{ in } \Omega_1 \\ \frac{\partial u_1}{\partial n_1} + \alpha_1 u_1 = \lambda_1 \text{ on } \Gamma_3 \end{cases}$$
$$\begin{cases} -\Delta u_2 = f_2 \text{ in } \Omega_2 \\ \frac{\partial u_2}{\partial n_2} + \alpha_2 u_2 = \lambda_2 \text{ on } \Gamma_3 \end{cases}$$

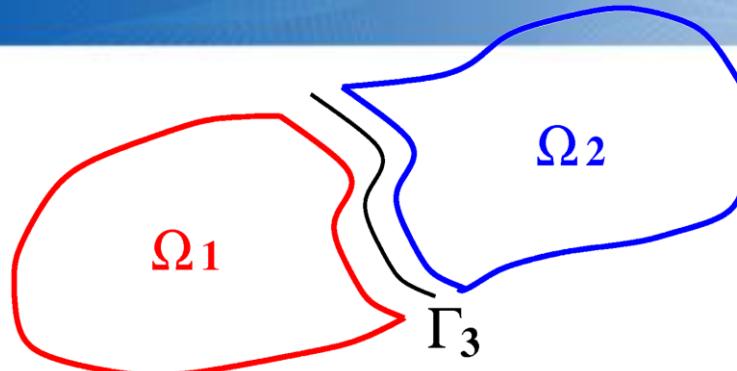

- Matching conditions on  $\Gamma_3$

$$\begin{cases} u_1 - u_2 = 0 \\ \frac{\partial u_1}{\partial n_1} + \frac{\partial u_2}{\partial n_2} = 0 \end{cases} \Leftrightarrow$$

$$\begin{cases} u_1 - u_2 = 0 \\ \lambda_1 - \alpha_1 u_1 + \lambda_2 - \alpha_2 u_2 = 0 \end{cases} \Leftrightarrow$$

$$\begin{cases} \lambda_1 - \alpha_1 u_1 + \lambda_2 - \alpha_2 u_1 = 0 \\ \lambda_1 - \alpha_1 u_2 + \lambda_2 - \alpha_2 u_2 = 0 \end{cases}$$

# Application to discrete problems : FETI-2LM method


- Global system of equations

$$\begin{pmatrix} K_{11} & 0 & K_{13} \\ 0 & K_{22} & K_{23} \\ K_{31} & K_{32} & K_{33} \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \\ x_3 \end{pmatrix} = \begin{pmatrix} b_1 \\ b_2 \\ b_3 \end{pmatrix}$$

- Local system of equations

$$\begin{pmatrix} K_{11} & K_{13} \\ K_{31} & K_{33}^{(1)} + k_1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_3^{(1)} \end{pmatrix} = \begin{pmatrix} b_1 \\ b_3^{(1)} + \lambda_1 \end{pmatrix}$$

$$\begin{pmatrix} K_{22} & K_{23} \\ K_{32} & K_{33}^{(2)} + k_2 \end{pmatrix} \begin{pmatrix} x_2 \\ x_3^{(2)} \end{pmatrix} = \begin{pmatrix} b_2 \\ b_3^{(2)} + \lambda_2 \end{pmatrix}$$

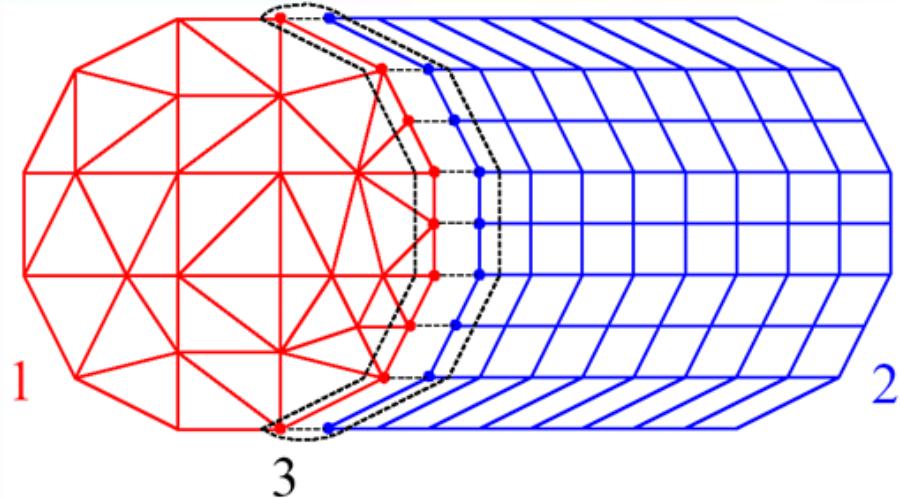

- Interface conditions

$$\begin{cases} x_3^{(1)} = x_3^{(2)} \\ K_{31}x_1 + K_{32}x_2 + K_{33}^{(1)}x_3^{(1)} + K_{33}^{(2)}x_3^{(2)} = b_3 \\ \Leftrightarrow \lambda_1 + \lambda_2 - k_1 x_3^{(1)} - k_2 x_3^{(2)} = 0 \end{cases}$$

$$\begin{cases} \lambda_1 + \lambda_2 - (k_1 + k_2)x_3^{(2)} = 0 \\ \lambda_1 + \lambda_2 - (k_2 + k_1)x_3^{(1)} = 0 \end{cases}$$

# Condensed interface problem

- Local condensation

$$(k_1 + K_{33}^{(1)} - K_{31} K_{11}^{-1} K_{13}) x_3^{(1)} = \lambda_1 + b_3^{(1)} - K_{31} K_{11}^{-1} b_1$$

$$(k_2 + K_{33}^{(2)} - K_{32} K_{22}^{-1} K_{23}) x_3^{(2)} = \lambda_2 + b_3^{(2)} - K_{32} K_{22}^{-1} b_2$$

- Matrix of interface problem

DD 23 FX Roux FETI-2LM multiple RHS

$$\begin{pmatrix} I & & I - (k_1 + k_2)(k_2 + K_{33}^{(2)} - K_{32} K_{22}^{-1} K_{23})^{-1} \\ I - (k_2 + k_1)(k_1 + K_{33}^{(1)} - K_{31} K_{11}^{-1} K_{13})^{-1} & & I \end{pmatrix}$$

# Optimal Robin interface conditions

- Optimal interface conditions

$$\begin{aligned} k_1 &= K_{33}^{(2)} - K_{32} K_{22}^{-1} K_{23} \\ k_2 &= K_{33}^{(1)} - K_{31} K_{11}^{-1} K_{13} \end{aligned}$$

- Optimal conditions = static condensation on interface of remaining structure
- Interpretation via local static condensation in global system of equations

DD 23 FX Roux FETI-2LM multiple RHS

$$\begin{pmatrix} K_{11} & & K_{13} \\ K_{31} & K_{33}^{(1)} + K_{33}^{(2)} - K_{32} K_{22}^{-1} K_{23} \end{pmatrix} \begin{pmatrix} x_1 \\ x_3 \end{pmatrix} = \begin{pmatrix} b_1 \\ b_3^{(1)} + b_3^{(2)} - K_{32} K_{22}^{-1} b_2 \end{pmatrix}$$

- Dirichlet to Neumann mapping for domain exterior


# FETI-2LM applied to Maxwell

$$\Omega = \Omega_1 \cup \Omega_2 \dots \cup \Omega_N$$

Domain partition

$$\begin{cases} \nabla \times (\frac{1}{\tilde{\mu}_r} \nabla \times \vec{E}_i) - k_0^2 \tilde{\epsilon}_r \vec{E}_i = k_0^2 (\epsilon_{r,i} - \mu_{r,i}^{-1}) \vec{E}_{incident} & \text{in } \Omega_i \subset R^3 \\ \vec{n}_i \times (\frac{1}{\tilde{\mu}_{r,i}} \nabla \times \vec{E}_i) + jk_0 \vec{n}_i \times (\vec{n}_i \times \vec{E}_i) = \vec{\Lambda}_j^i & \text{on } \Gamma_i \quad (\text{Robin}) \\ \vec{n} \times (\nabla \times \vec{E}_i) + jk_0 \vec{n} \times (\vec{n} \times \vec{E}_i) = 0 & \text{on } \Gamma_{ext} = \partial \Omega_i \setminus \Gamma_i \end{cases}$$

Robin

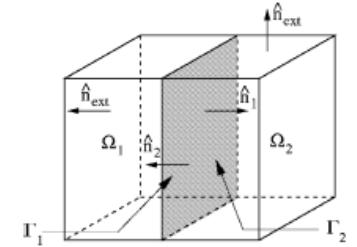

Additional variables on the interface (2 LM method)

Lagrange multipliers with approximate transparent Robin condition  
(approximate outer Dirichlet-Neumann)

$$\vec{n}_i \times (\mu_{r,i}^{-1} \nabla \times \vec{E}_j^i) + jk_0 \vec{n}_i \times (\vec{n}_i \times \vec{E}_j^i) = \vec{\Lambda}_j^i$$

Electric and Magnetic field Continuity

$$\vec{n}_i \times (\vec{n}_i \times \vec{E}_j^i) = \vec{n}_j \times (\vec{n}_j \times \vec{E}_i^j) \quad (1)$$

$$\vec{n}_i \times (\mu_{r,i}^{-1} \nabla \times \vec{E}_j^i) = -\vec{n}_j \times (\mu_{r,j}^{-1} \nabla \times \vec{E}_i^j) \quad (2)$$

$$\vec{n}_j \times (\mu_{r,j}^{-1} \nabla \times \vec{E}_i^j) + jk_0 \vec{n}_j \times (\vec{n}_j \times \vec{E}_i^j) = \vec{\Lambda}_i^j$$



$$\Lambda_j^i + \Lambda_i^j - 2jk_0 \vec{n}_i \times (\vec{n}_i \times \vec{E}_j^i) = 0$$

$$\Lambda_j^i + \Lambda_i^j - 2jk_0 \vec{n}_j \times (\vec{n}_j \times \vec{E}_i^j) = 0$$


# Krylov subspace method and iterations


$$\begin{cases} \Lambda_j^i + \Lambda_i^j - 2jk_0 \vec{n}_i \times \vec{n}_i \times E_j^i = 0 \\ \Lambda_j^i + \Lambda_i^j - 2jk_0 \vec{n}_j \times \vec{n}_j \times E_i^j = 0 \end{cases} \quad \text{on } \Gamma^{ij}$$
$$\lambda_j^i + \lambda_i^j - (M_j^i + M_i^j)E_j^i = 0 \quad i=1,2,\dots,N_s \quad \text{and} \quad j \in \text{neighbor}(i)$$
$$M_j^i = jk_0 \int_{\Gamma_{ij}} (\vec{n}_i \times \vec{W}_i) \cdot (\vec{n}_i \times \vec{W}_i) dS$$

Computation of  $F\lambda - d$

1. Solution of local problem with Robin conditions defined by  $\lambda$
2. Exchange values of  $E$  and  $\lambda$  on interfaces
3. On each interface  $\Gamma_i^j$ , computation of :





$$g_i^j = \lambda_j^i + \lambda_i^j - (M_j^i + M_i^j)E_j^i$$



ORTHODIR iterations until  $\| Kx - b \| <$  stopping criterion


# Tests on prototype antenna array

- 44x44 array
- 1936 subdomains, 400M unknowns
- Comparison between numerical results and experimental results OK

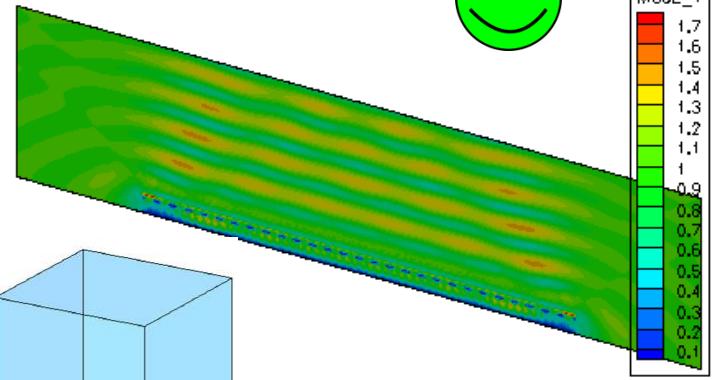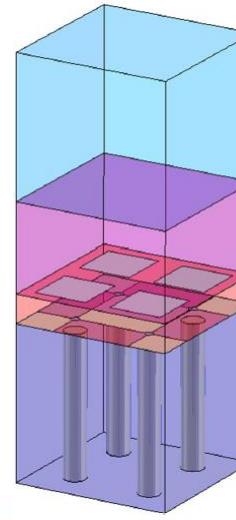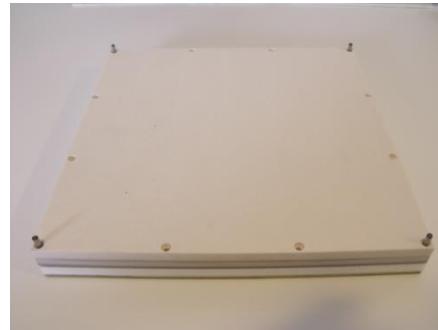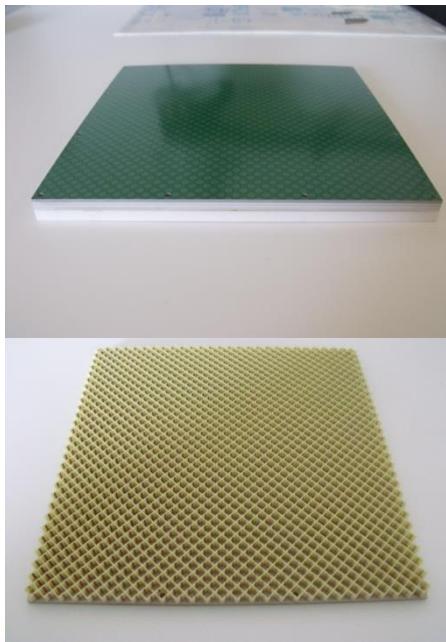

# Weak scalability

- Timings with one subdomain per core
- Increasing size of the array

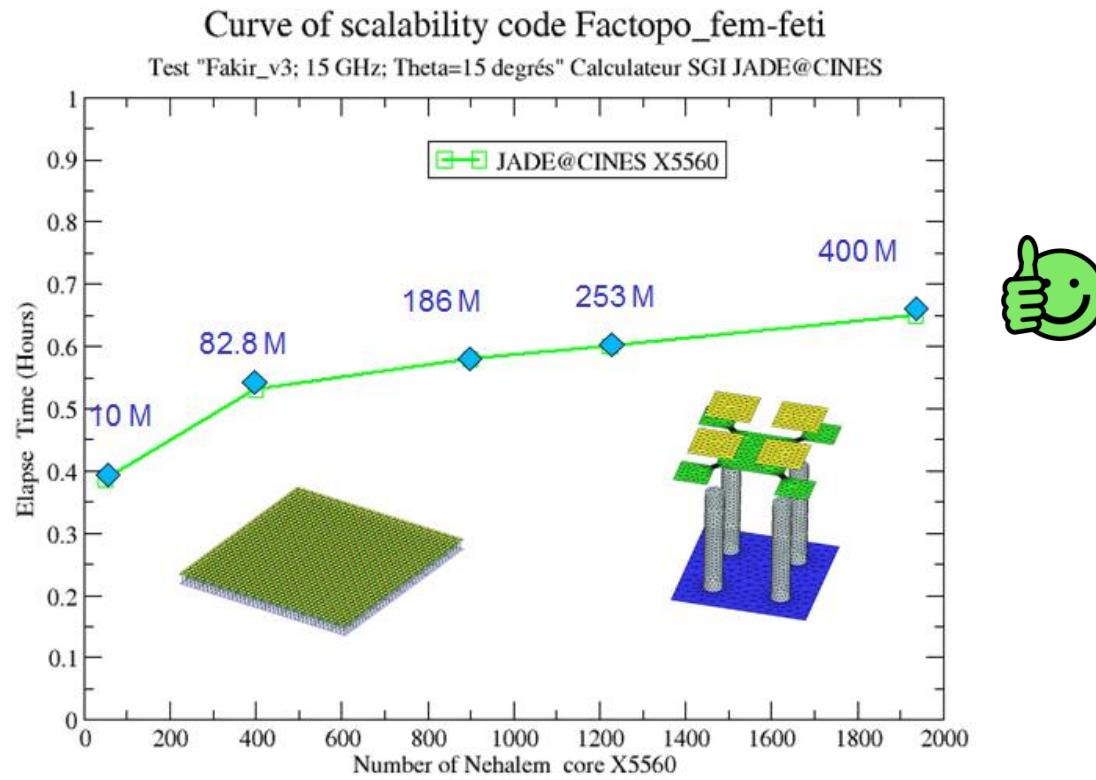

# ORTHODIR algorithm

- ORTHODIR : build a  $F^*F$ -orthogonal basis of Krylov space

$$\begin{cases} g_0 = F\lambda_0 - d \\ v_0 = g_0 \\ Fv_0 \\ d_0 = \|Fv_0\| \end{cases} \quad \left\{ \begin{array}{l} \lambda_p = \lambda_{p-1} + \rho_{p-1} v_{p-1} \\ g_p = g_{p-1} + \rho_{p-1} Fv_{p-1} \\ (Fv_{p-1})^* g_p = 0 \Leftrightarrow d_{p-1} \rho_{p-1} = -(Fv_{p-1})^* g_{p-1} \\ \qquad \qquad \qquad \quad -(Fv_{p-1})^* g_0 \end{array} \right. \quad \left\{ \begin{array}{l} v_p = Fv_{p-1} + \sum_0^{p-1} \gamma_{ip} v_i \\ Fv_p = FFv_{p-1} + \sum_0^{p-1} \gamma_{ip} Fv_i \\ \gamma_{ip} = -(Fv_i)^* FFv_{p-1} \\ d_p = \|Fv_p\| \end{array} \right.$$

- ORTHODIR : block formulation

$$V^p = [v_0 \ v_1 \ \cdots \ v_{p-1}], \quad (FV^p)^* (FV^p) = D^p, \quad D^p \rho^p = -(FV^p)^* g_0$$

$$\left\{ \begin{array}{l} \lambda_p = \lambda_0 + V^p \rho^p \\ g_p = g_0 + FV^p \rho^p \end{array} \right. \quad \rho^p = -(FV^p)^* g_0$$

# Restarted ORTHODIR with multiple RHS




- $V^p$  and  $F V^p$  are given ,  $(F V^p)^* (F V^p) = D_p$
- Optimal starting  $\lambda_0^{opt}$

$$\begin{cases} \lambda_0^{opt} = \lambda_0 + V^p \rho^p \\ g_0^{opt} = g_0 + FV^p \rho^p \end{cases} \quad D^p \rho^p = - (FV^p)^* g_0 \Leftrightarrow - (FV^p)^* g_0^{opt} = 0$$

- Start new iterations with new search directions  $F^*F$ -orthogonal to  $V^p$
- $F^*F$ -projected ORTHODIR
- In practice same as if restarting ORTHODIR at iteration  $p$
- Accumulation of search directions with successive RHS


# Dependancy upon number of stored directions

- 17x17 array
- 289 subdomains, 50 Million unknowns
- 31 RHS, incident waves with various angles

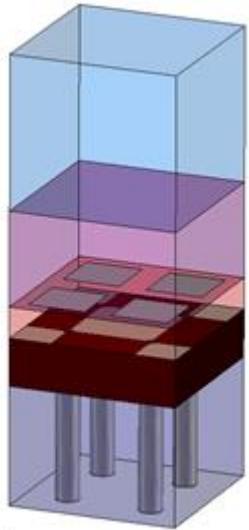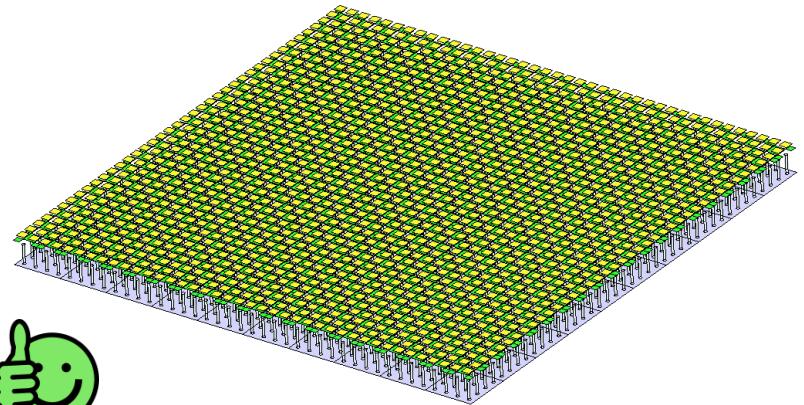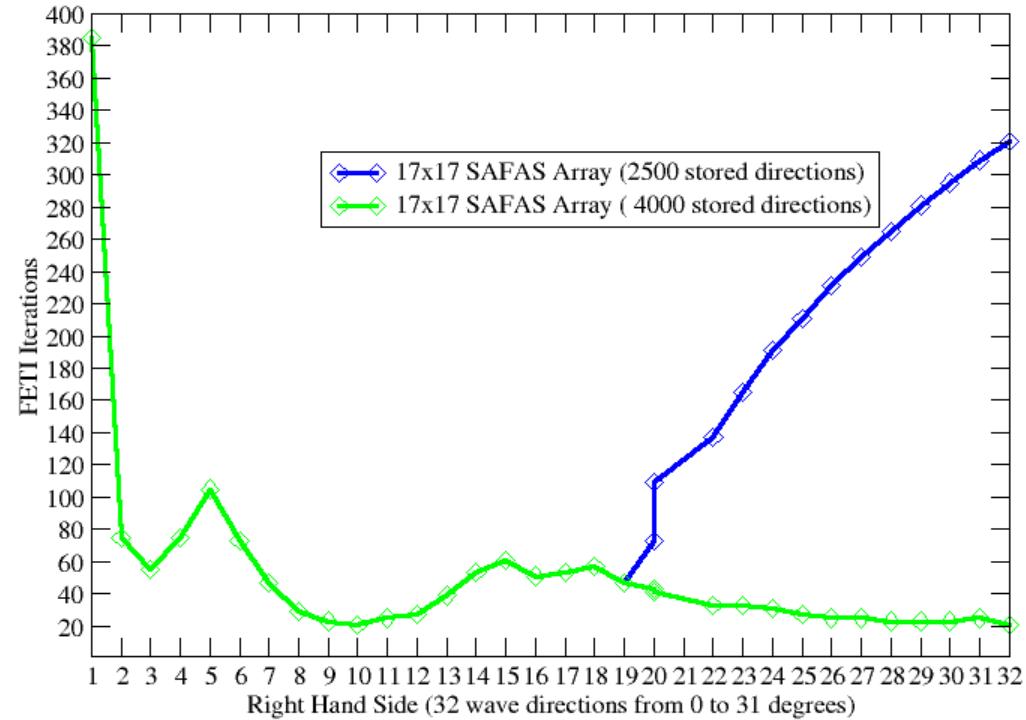


# Computer architecture

- Networked compute nodes
- Each node is a hierarchical memory SMP with possibly parallel co-processor
- Space and time locality of data required for performance
- Present trend: increasing number of cores on each node

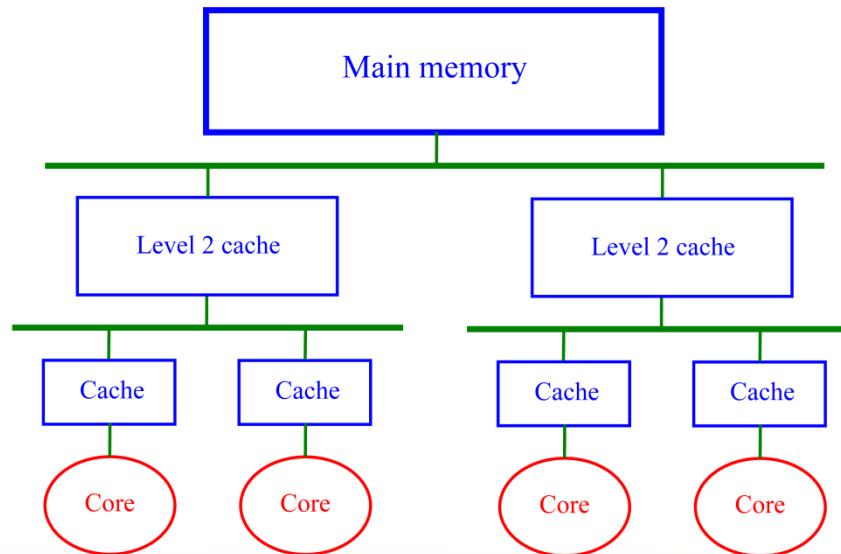

# Local direct solver on SMP compute node

- Sparse direct solver based on nested bisection
- P-threads multi-threading management
- Splitting of blocks in small sub-blocks

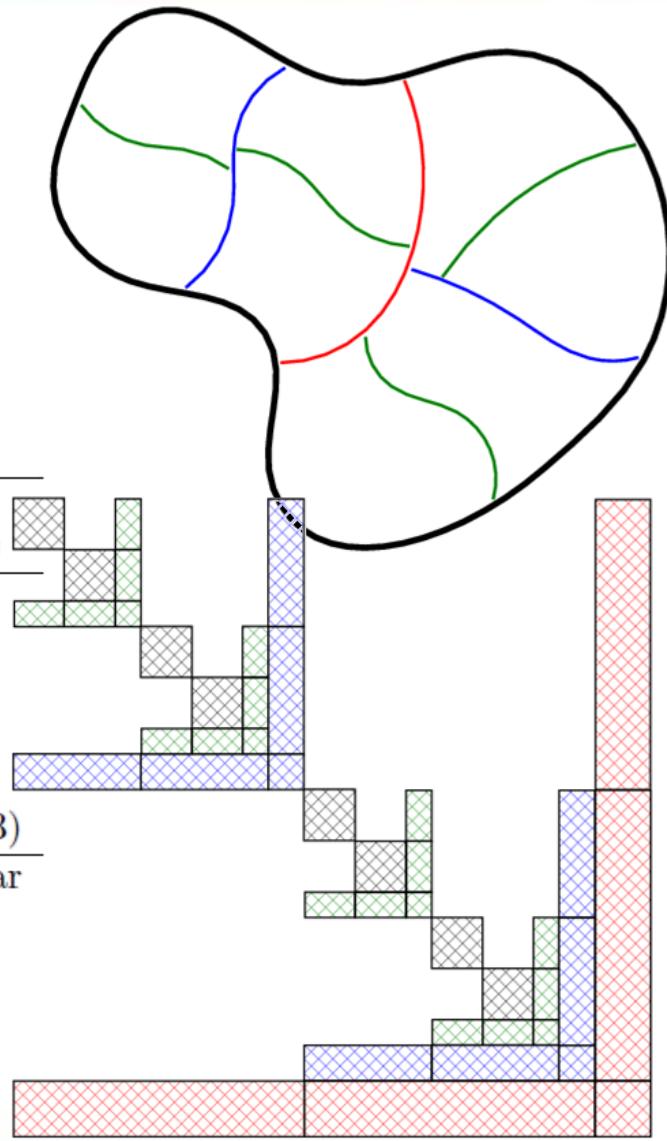

# cores	Dissection		Pardiso	
	CPU time	elapsed time	CPU	elapsed time
1	74.84	72.824	85.04	82.941
2	74.81	38.162	87.79	43.627
4	77.32	20.454	92.66	23.141
6	79.96	15.200	104.38	17.391
8	83.56	12.008	118.25	14.786
12	94.08 ( $\times 1.26$ )	9.873 (/7.38)	165.99 ( $\times 1.95$ )	13.993 (/5.93)

elstct1,  $N = 206,763$ , nonsingular

# Efficiency of multiple forward-backward substitution

- Actual performance limited by global memory access
- Parallelization of forward-backward substitution for a single RHS gives very limited performance (speed-up < 2)
- With multiple RHS, higher arithmetic complexity with same memory access requirement (better data locality)

	1RHS @ 1core	12 RHS @ 12core	efficiency	
Dissection	0.6194 sec.	0.5135 sec	120.6%	
Pardiso	0.7054 sec.	1.2642 sec	55.8%	

- With more than one subdomain per node, memory bandwidth available for each MPI process is even lower
- Performance of each single RHS forward-backward substitution is even poorer



# Limited parallel efficiency of restarted ORTHODIR

- One product by  $F$  per iteration
- Single RHS local forward-backward substitution
- For numerical stability, use modified Gram-Schmidt procedure for orthogonalization
- dot product (BLAS1) + global reduction via MPI one by one

- Inefficient for local multi-threading on multi-core node
- Large communication overhead



- Use simultaneous solution
- Keep good properties of restarted ORTHODIR

} => block ORTHODIR

# Block ORTHODIR algorithm

- Block ORTHODIR initialization

$$\begin{cases} g_0^k = F\lambda_0^k - d^k \\ v_0^k = g_0^k \end{cases}, k = 1, n_{block}$$

$$\begin{cases} \Lambda_0 = [\lambda_0^1 \lambda_0^2 \cdots \lambda_0^{n_{block}}] \\ G_0 = [g_0^1 g_0^2 \cdots g_0^{n_{block}}] \\ V_0 = [v_0^1 v_0^2 \cdots v_0^{n_{block}}] \\ D_0 = (FV_0)^*(FV_0) = L_0 L_0^* \end{cases}$$

- Block ORTHODIR iteration

$$\begin{cases} \Lambda_p = \Lambda_{p-1} + V_{p-1} P_{p-1} \\ G_p = G_{p-1} + FV_{p-1} P_{p-1} \\ (FV_{p-1})^* G_p = 0 \Leftrightarrow D_{p-1} P_{p-1} = -(FV_{p-1})^* G_{p-1} \end{cases}$$

$$\begin{cases} V_p = FV_{p-1} + \sum_0^{p-1} V_i \Gamma_{ip} \\ FV_p = FFV_{p-1} + \sum_0^{p-1} FV_i \Gamma_{ip} \\ \Gamma_{ip} = -(FV_i)^* FFV_{p-1} \\ D_p = (FV_p)^*(FV_p) = L_p L_p^* \end{cases}$$



# Block ORTHODIR implementation

- Optimal solution for each RHS using all search directions computed for all RHS
- Rank revealing  $LL^*$  factorization of  $D_p$ , automatic detection of dependencies between search directions, reduction of number of search directions
- Same property as restarted ORTHODIR in term of decrease of global number of directions to be computed
- $n_{block}$  simultaneous forward-backward substitutions at each iteration, good parallel efficiency on multi-core nodes
- Simultaneous computation of dot products, BLAS3, good parallel efficiency on multi-core nodes, global reduction for a block of scalars at once, reduced MPI overhead
- Restarted block ORTHODIR straightforward



# Timings with various multi-RHS strategies

- 17x17 array ; 289 cores, 31 RHS, 50M unknowns

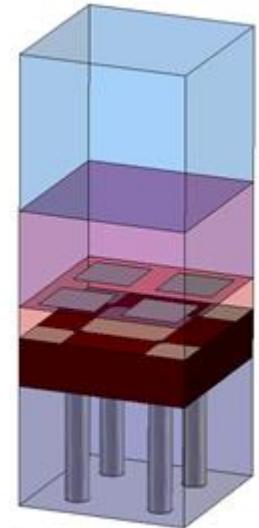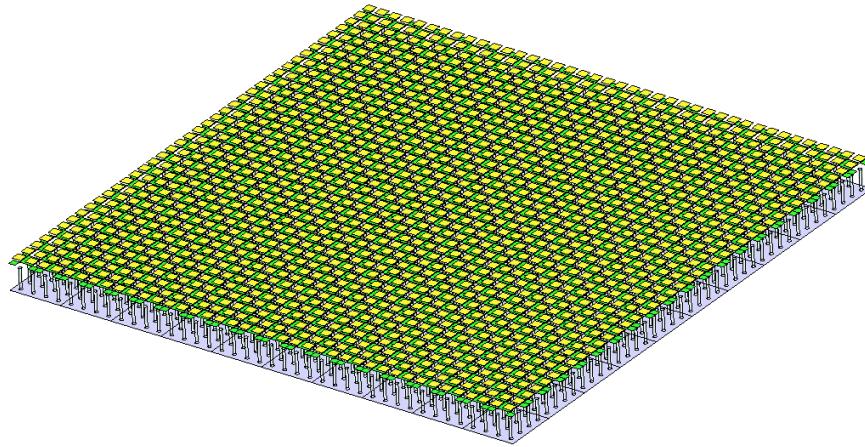

289 CORE 50 MILLION DOF	GRID	RHS	STORED DIRECTIONS	ELAPSE TIME(H)	MEMORY/CORE (Gb)
FIRST RHS	17x17	1	2500	0.96	1.15
INITIAL RHS STRATEGY	17x17	31	2500	3.30	1.15
BLOCK RHS STRATEGY	17x17	31	2500	0.8	1.4

Time / 9  
  
Time / 37

# Conclusion

Block ORTHODIR strategy is good for reducing complexity, increasing shared memory parallel efficiency of local direct solver on multi-core node and reducing message passing overhead

Make the design of good preconditioner less important